


STANDARD PROGRAM WOVEN TAPES


Woven tapes

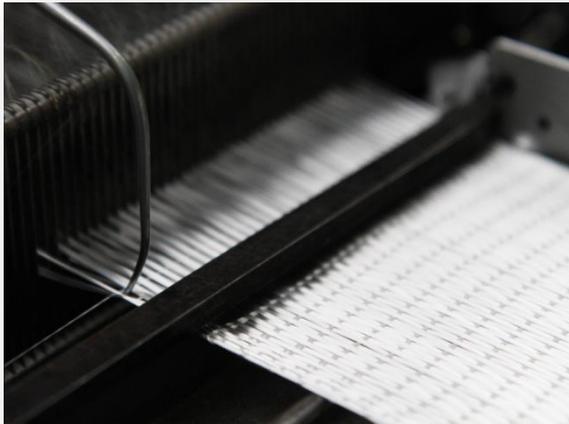

Eurocarbon is a producer of both woven and unidirectional tapes in several different styles and reinforcement materials. Tapes provide reinforcement in the 0 and 90 degrees direction.

With the standard program woven tapes, we are able to supply a selection of woven tapes, in an off-the-shelf delivery.

The available widths for each weave construction are marked with a "X" when available in this width. Other widths may be available, contact our sales department for more information.

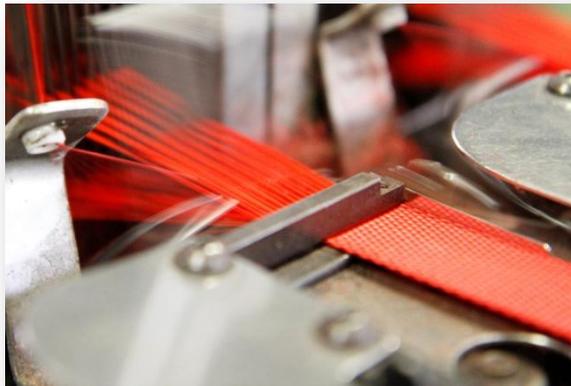

E-100



STANDARD PROGRAM

WOVEN TAPES

Woven tapes

Uni-directional tapes

Article	Material	Thickness in mm	Weight g/m ²	Width in mm (available)						
				12,5	25	37,5	50	75	100	120
E	Glass	0,48	600		X	X	X	X	X	
G	Carbon 12K	0,38	340		X	X	X	X	X	X
155	Carbon 12K	0,42	375		X		X	X	X	X
1009	Carbon 3K	0,22	200				X		X	
301	Aramid	0,33	205	X	X	X	X			
708	Carbon/Aramid 1:1	0,44	330		X	X				
703	Carbon/Glass 1:1	0,47	480		X	X				
911	Dyneema	0,29	115		X					

Thickness is calculated at 50 Vol% Fiber Fraction

Woven Tapes

Article	Material	Thickness in mm	Weight g/m ²	Width in mm (available)						
				12,5	25	37,5	50	75	100	120
521	Glass	0,11	140		X		X			
568	Glass	0,16	205		X		X	X	X	
501	Glass	0,23	290		X		X	X	X	X
507	Glass	0,36	450		X		X	X	X	
186	Carbon 3K	0,22	200		X		X	X	X	
118	Carbon 3K	0,28	250		X		X	X	X	
125	Carbon 12K/6K	0,59	530		X		X	X		
341	Aramid	0,30	190		X		X			
320	Aramid	0,43	270		X		X			

Place the width behind the article number when ordering, example: E/37½ or 125/75